

Ningbo Chutong Electronics Co.,Ltd

stereozoom microscope 7x-45x with upper and lower light sources




Item number SZM45-B1 (with upper and lower light source)

Performance characteristics:

1.High quality optical components coated with special film create high-quality optical image. 2. Flat image plane and good contrast positive image are formed in large field of view, especially in the peripheral field of view. 3. Continuous zoom objective lens 0.7x ~ 4.5X (6.3:1) and standard magnification 7x ~ 45x are adopted.

4.The effective standard working distance is 100 mm.5. The observation head is inclined at 45 ° and the binocular visibility is adjustable to ensure that users with different eyesight can obtain clear and satisfactory images. 6. Ergonomic structure design, eye point height, long-time use without fatigue. 7. Zoom handwheel horizontal (axial) bilateral setting, convenient and comfortable operation, high zoom repetition accuracy. 8. With a variety of accessories, expand the application field.

Ningbo Chutong Electronics Co.,Ltd

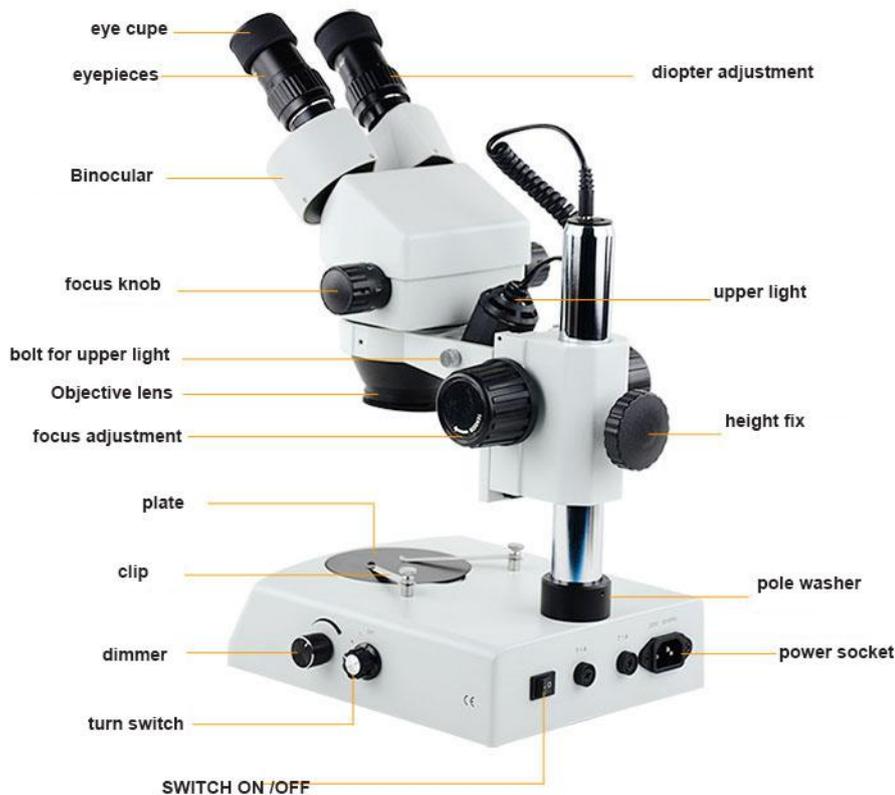

Specification parameters:

| | |
|-------------------------------|---|
| Focusing type | Continuous zoom |
| eyepiece | Binocular 10x / 20mm |
| Zoom range of objective lens | 0.75X-4.5X |
| Magnification | 7.5X-45X |
| Zoom ratio | 1:6.3 |
| Maximum working distance | 100mm |
| light source | The upper and lower light source is halogen lamp 12V15W (brightness adjustable) |
| Observation head | Binocular observation angle 45 degrees |
| pupillary distance adjustment | 54-76mm |
| Range of accommodation | ± diopter |
| Focus locked | The focus hand wheel is adjustable, and the lifting range is 50 mm |
| Base size | 255*200*40mm |
| | |

Ningbo Chutong Electronics Co.,Ltd

Standard configuration

